



Submittal Data Information

101-082

Model 003-IFC® Cartridge Circulator

Effective: April 1, 2006

Supersedes: September 1, 2003

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.	IMP. DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.

Features

- Integral Flow Check (IFC®) Patent# 5,664,939
Prevents gravity flow / reverse flow
Eliminates separate in-line flow check
Reduces installed cost
Improves system performance
Easy to service
- Unique replaceable cartridge-Field serviceable
- Unmatched reliability-Maintenance free
- Quiet, efficient operation
- Self lubricating, No mechanical seal
- Wide range of applications
- 1/2", 3/4" Sweat, or Union connections

Materials of Construction

Casing (Volute): Bronze
Integral Flow Check (IFC®):
Body, Plunger....Acetal
O-ring Seals.....EPDM
Spring.....Stainless Steel
Stator Housing: Steel
Cartridge: Stainless Steel
Impeller: Non-Metallic
Shaft: Ceramic
Bearings: Carbon
O-Ring & Gaskets: EPDM

Model Nomenclature

B – Bronze
BC – Bronze, Panel Mount Tabs
IFC – Integral Flow Check

Performance Data

Flow Range: 0 - 6 GPM
Head Range: 0 - 4.5 Feet
Minimum Fluid Temperature: 40°F (4°C)
Maximum Fluid Temperature: 220°F (104°C)
Maximum Working Pressure: 125 psi
Connection Sizes: 1/2", 3/4" Sweat, Union Mount



FOR INDOOR USE ONLY


Application

- Domestic Hot Water Recirculation
- Hydro-Air Fan Coils
- Heat Recovery Units
- Water Source Heat Pumps
- Potable Water Systems


The 003-IFC with an Integral Flow Check (IFC®) is designed for the circulation of hot or chilled fresh water in open or closed loop applications. The IFC feature simplifies piping, eliminates separate in-line flow check, reduces installation costs and improves system performance. With its patented location at the impeller inlet, the IFC is easy to service without removing the entire unit from system piping. The unique, replaceable cartridge contains all of the moving parts and allows for easy service instead of replacing the entire circulator.

Pump Dimensions & Weights

Model	Conn.	A		B		C		D		E		F		Ship Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
003-BC4-1-IFC	1/2" Swt	6	152	4-7/8	124	2-3/16	56	2-15/16	75	3-5/16	84	4-3/8	111	6.0	2.7
003-BC4-IFC	3/4" Swt	6	152	4-7/8	124	2-3/16	56	2-15/16	75	3-5/16	84	4-3/8	111	6.0	2.7
003-B4-2-IFC	Union	6	152	4-7/8	124	2-3/16	56	2-15/16	75	3-5/16	84	5-15/16	151	6.0	2.7

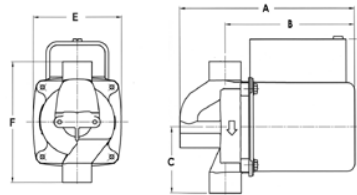


Mounting Positions

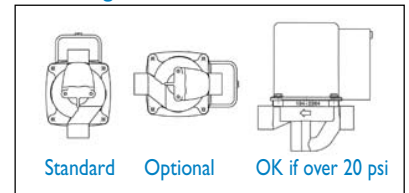

Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
All Models	115	60	1	.45	3250	1/40
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

Performance Field - 60Hz

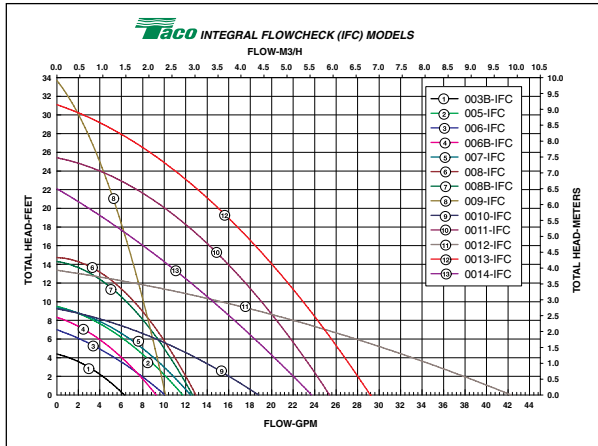

Do it Once. Do it Right.®

TACO INC., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 Fax: 942-2360
TACO (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3 Telephone: (905) 564-9422 Fax: (905) 564-9436

Printed in USA
Copyright 2006
TACO, Inc.

Visit our website at: www.taco-hvac.com