



Submittal Data Information

101-120

LoadMatch® Twin-Tee®


Effective: February 12, 2016

Supersedes: July 30, 2006

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.

Furnish and install Twin-Tee® fittings for secondary circuit piping connections to primary circuit piping as shown on the plans. Twin-Tee® shall be Taco or approved equal. The Twin-Tee® fitting shall permit the connection of both secondary circuit supply and return piping connections to the same fitting. An internal baffle shall permit the supply and return connections and flow direction of the secondary circuit piping connections to remain the same, independent of the direction of flow in the primary circuit piping, without mixing of the secondary circuit supply and return water flows.

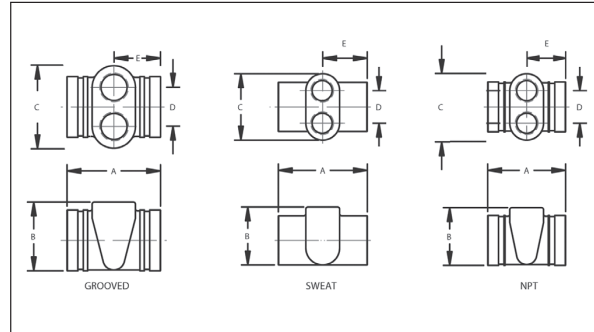

Model #	Line Size in. (mm)	Line Connections	Branch Size NPT* in. (mm)	Dimensions					Cv	Ship Weight (lbs.)
				A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)		
DUCTILE IRON										
TT150G	1-1/2 (38)	Grooved	3/4 (19)	3-3/4 (95)	2-1/8 (54)	2-3/4 (70)	1-3/8 (35)	1-7/8 (48)	102	2.0
TT200G	2 (51)	Grooved	3/4 (19)	4-3/8 (111)	2-3/4 (70)	3 (76)	1-1/2 (38)	2-1/8 (54)	166	3.0
TT250G	2-1/2 (64)	Grooved	1 (25)	4-1/2 (114)	3-3/8 (86)	3-7/8 (98)	1-3/4 (44)	2-1/4 (57)	252	4.0
TT300G	3 (76)	Grooved	1-1/4 (32)	5-3/8 (137)	4 (102)	3-7/8 (98)	2-1/4 (57)	2-3/4 (70)	379	5.0
TT400G	4 (102)	Grooved	1-1/2 (38)	6-1/8 (156)	5 (127)	5-1/8 (130)	2-1/2 (64)	3 (76)	714	8.0
TT500G	5 (127)	Grooved	2 (51)	6-3/4 (171)	6 (152)	6-3/8 (162)	3 (76)	3-3/8 (86)	1094	11.0
TT600G	6 (152)	Grooved	2-1/2 (64)	7-3/4 (197)	7-1/4 (184)	7-7/8 (200)	3-3/4 (95)	3-7/8 (98)	1670	16.5
TT125T	1-1/4 (32)	NPT	3/4 (19)	3-3/8 (86)	2-1/2 (64)	3 (76)	1-1/2 (38)	1-5/8 (41)	74	2.0
TT150T	1-1/2 (38)	NPT	3/4 (19)	4-3/8 (111)	2-3/4 (70)	3 (76)	1-1/2 (38)	2-1/8 (54)	102	2.5
TT200T	2 (51)	NPT	3/4 (19)	4-1/2 (114)	3-3/8 (86)	3-7/8 (98)	1-7/8 (48)	2-1/4 (57)	166	3.5
TT250T	2-1/2 (64)	NPT	1 (25)	5-3/8 (137)	4 (102)	3-7/8 (98)	2-1/4 (57)	2-3/4 (70)	252	6.0
TT300T	3 (76)	NPT	1-1/4 (32)	6-1/8 (156)	5 (127)	5-1/8 (130)	2-1/2 (64)	3 (76)	379	9.0
TT400T	4 (102)	NPT	1-1/2 (38)	6-7/8 (175)	5-7/8 (149)	6-3/8 (162)	3 (76)	3-3/8 (86)	714	15.0
BRONZE										
TT125TB	1-1/4 (32)	NPT	1/2 (13)	3-3/8 (86)	2-1/4 (57)	2-3/4 (70)	1-3/8 (35)	1-5/8 (41)	74	2.0
TT125TB-1	1-1/4 (32)	NPT	3/4 (19)	3-3/8 (86)	2-1/2 (64)	3 (76)	1-1/2 (38)	1-5/8 (41)	74	2.0
TT150TB	1-1/2 (38)	NPT	1/2 (13)	3-5/8 (92)	2-5/8 (67)	3 (76)	1-3/8 (35)	1-7/8 (48)	102	3.0
TT150TB-1	1-1/2 (38)	NPT	3/4 (19)	3-5/8 (92)	2-3/4 (70)	3 (76)	1-1/2 (38)	1-7/8 (48)	102	3.0
TT200TB	2 (51)	NPT	3/4 (19)	4-1/2 (114)	3-1/4 (83)	3-1/2 (89)	1-1/2 (38)	2-1/4 (57)	166	3.5
TT250TB	2-1/2 (64)	NPT	1 (25)	5-3/8 (137)	3-3/4 (95)	4-1/4 (108)	1-7/8 (48)	2-3/4 (70)	252	6.0
TT125SB	1-1/4 (32)	Sweat	1/2 (13)	4 (102)	1-7/8 (48)	2-3/4 (70)	1-3/8 (35)	2 (51)	74	1.0
TT125SB-1	1-1/4 (32)	Sweat	3/4 (19)	4 (102)	2-1/4 (57)	3 (76)	1-1/2 (38)	2 (51)	74	1.0
TT150SB	1-1/2 (38)	Sweat	1/2 (13)	4-1/8 (105)	2 (51)	2-3/4 (70)	1-3/8 (35)	2 (51)	102	1.5
TT150SB-1	1-1/2 (38)	Sweat	3/4 (19)	4-1/8 (105)	2-1/2 (64)	3 (76)	1-1/2 (38)	2 (51)	102	1.5
TT200SB	2 (51)	Sweat	3/4 (19)	4-5/8 (117)	2-5/8 (67)	3 (76)	1-1/2 (38)	2-3/8 (60)	166	2.0
TT250SB	2-1/2 (64)	Sweat	1 (25)	5-1/8 (130)	3-3/8 (86)	3-7/8 (98)	1-7/8 (48)	2-1/2 (64)	252	4.5

All dimensions are nominal. +/- 1/16"
 *Branch connections only available in US NPT dimensions



Taco, Inc., 1160 Cranston Street, Cranston, RI 02920 | Tel: (401) 942-8000 | FAX: (401) 942-2360

Taco (Canada), Ltd., 8450 Lawson Road, Suite #3, Milton, Ontario L9T 0J8 | Tel: (905) 564-9422 | FAX: (905) 564-9436

Visit our web site: www.TacoComfort.com | Printed in USA | ©2015 Taco, Inc.

