

# **Submittal Data Information**

101-161

# FloodBreaker® Whole House Water Shut Off

Effective: December 10, 2014 Supersedes: June 1, 2013

Job: Eng	ineer:	Contractor:	_ Rep:
ITEM NO.	MODEL NO.		

#### **Features**

Programmable Leak Detection Settings

Programmable Vacation Mode Leak Settings

Audible Alarm

Floor Sensor

**Output Contact** 

Input Contact

Operates on Batteries and 9V DC Power Supply

Reduces Property Damage

Push Button Reset

Mounts in Horizontal or Vertical Pipe

#### **Performance**

Max. Flow: 15.5 gpm (58.7 L/Min) Caution: Flow should never exceed standards for pipe size Max. Water Temperature 86°F (30°C)

Max. Inlet Pressure: 230 psi (15.9 Bar)

Power Supply 9V DC

(4) AA Batteries

Connection Sizes: 3/4", 1", 1-1/4" NPT

#### **Materials**

Body: Brass ≤ .25% lead

Internal Components:

Brass ≤ .25% lead

Acetal

Nylon


Seals: EPDM


## **Approvals**




### **Application**

The Taco FloodBreaker® is a whole house adjustable leak detection system the monitors several aspects of water usage. It shuts off the water supply once any of the monitored settings are reached. Use FloodBreaker to protect homes from water damage, eliminate waste and protect unoccupied or vacation properties. Not only can it protect against a large catastrophic leak but is capable of protecting against the small unnoticed leak that could go on for weeks, months or even indefinitely.

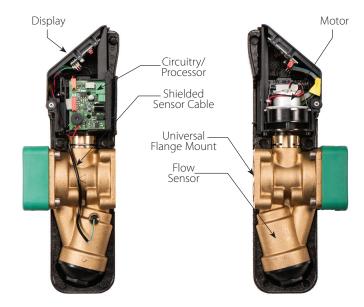





#### FloodBreaker® Dimensions

<b>DIMENSIONS</b> (For reference only)	in.	mm
А	4-1/4	108
В	15/16	24
C	4-1/8	105
D	3	76
Е	12-3/32	307
F	6-55/64	174
G	4-47/64	120



Fax: (905) 564-9436

